


5. DIZALICE, KOLICA I HVATALJKE Hoists, clamps

5.6. Koloture

Nosivost kolotura se smanjuje s porastom kuta između užeta! Nosivost se množi sa faktorom kuta.


Radni kut	Faktor kuta	Radni kut	Faktor kuta	Radni kut	Faktor kuta
Working angle	Angle factor	Working angle	Angle factor	Working angle	Angle factor
0 °	2	70 °	1,64	140 °	0,68
10 °	1,99	80 °	1,53	150 °	0,52
20 °	1,97	90 °	1,41	160 °	0,35
30 °	1,93	100 °	1,29	170 °	0,17
40 °	1,87	110 °	1,15	180 °	0
45 °	1,84	120 °	1,0		
50 °	1,81	130 °	0,84		
60 °	1,73	135 °	0,76		

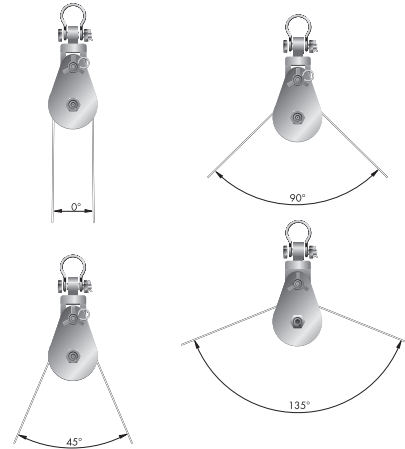

Kolotura teška izvedba RX-lift

Heavy duty snatch block RX-lift

Veličina užnice (mm)	Nosivost (t)	LS tip A1 (mm)	LH tip A2 (mm)	B (mm)	C (mm)	Promjer užeta (mm)	Neto težina (kg)
Sheave size	WLL					Rope dia.	Net weight
75	2	286	292	82	70	7-9	3,9
115	4	345	358	120	70	10-12	6,2
150	4	399	412	160	70	16-18	8,4
150	8	475	498	160	93	20-22	14,1
200	8	528	549	210	98	20-22	19,0
200	15	663	672	230	102	22-24	34,0
250	10	679	695	260	115	24-26	36,0
250	12	679	701	260	115	24-26	36,0
300	12	767	797	310	133	24-26	56,0
300	15	884	797	310	133	26-28	58,0
355	22	952	960	365	140	28-32	112,0
400	22	1019	1027	415	140	28-32	122,0
400	30	1126	1085	415	155	32-35	170,0
500	30	1256	1177	514	162	32-35	213,0



* tip LH

* tip LS




2.1 2.2

Kolotura rasklopiva B076 RX-lift

Snatch block

Veličina užnice (mm)	Nosivost (t)	A1 (mm)	A2 (mm)	B (mm)	C1 (mm)	C2 (mm)	Promjer užeta (mm)	Neto težina (kg)
Sheave size	WLL						Rope dia.	Net weight
75	0,5	268	227	87	50	77	8	1,55
100	1,0	311,5	284,5	112	55,5	88	10	2,45
125	1,5	370	344	140	63,5	100	13	3,85
150	2,0	442,5	417	168	101	146	16	6,45
180	3,0	498	478	204	107	157	19	11,0
200	4,5	590,5	556	226	128	188	22	12,8
250	5,0	706,5	651	276	147	220	25	20,0



2.1 2.2