

1. ČELIČNA UŽAD I LANCI Wire ropes and chains


1.12. Lanci opće namjene

Lanac komercijalni, standardna karika

Chain for commercial use medium link

2.1 2.2 BL

Promjer a (mm)	b (mm)	c (mm)	Prekidna sila (kg)	Težina (kg/m)
Diameter			Breaking load	Weight
3	20	12	400	0,11
4	23	16	650	0,18
5	25	18	800	0,25
6	26	19	1100	0,35
7	26	23	1500	0,50
8	32	29	2400	0,78
10	35	35	3400	1,14
11	38	38	4600	1,58
13	50	45.5	6000	2,00

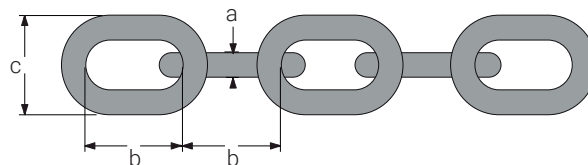


- komercijalni lanac za privez
- materijal: čelik
- završna obrada: cinčani, crni ili polirani

Lanac DIN 5685A

Chain for commercial use acc. to DIN 5685 type A

2.1 2.2 BL

Promjer a (mm)	b (mm)	c (mm)	Prekidna sila (kN)	Težina (kg/m)
Diameter			Breaking load	Weight
2,0	12	8	1,25	0,07
2,5	14	10	2,0	0,11
3,0	16	12	2,8	0,16
3,5	18	14	3,85	0,22
4,0	19	16	5,0	0,30
4,5	20	18	6,3	0,39
5,0	21	20	7,7	0,50
6,0	24	24	11,5	0,73
7,0	28	28	21,3	1,00
8,0	32	32	20,0	1,30
10,0	40	40	31,0	2,05
12,0	48	48	45,0	2,90
13,0	52	52	53,0	3,45

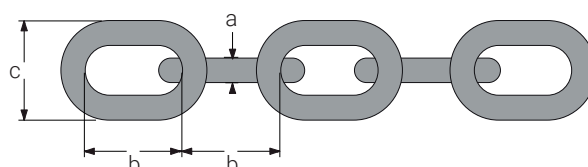

- lanac prema standardu: DIN 5685
- komercijalni lanac za privez
- materijal: čelik ili AISI 316
- završna obrada: cinčani, crni ili polirani

