

## 2. PRIBOR G80 I G100 G80 and G100 accessories

### 2.2. Pribor G100


**GUNNEBO**

Lanac prema EN 818-2 G100

Chain according to EN 818-2, G100

2.1 2.2 CE BL

Promjer a (mm)	Nosivost (t)	Min. prekidna sila (kN)	b (mm)	c (mm)	Težina (m/kg)
Diameter	WLL	MBL			Weight
6	1,5	58,9	18	20,5	0,87
7	1,95	77	21	24,0	1,14
8	2,6	102	24	27,0	1,45
10	4,0	158	30	34,0	2,25
13	6,8	268	39	43,7	3,76
16	10,3	402	48	53,9	5,64
20	16,0	630	60	67,0	9,4
22	20,0	785	66	73,0	11,9
26	27,0	1062	78	87,0	16,4
32	40,0	1610	96	105,6	25,8

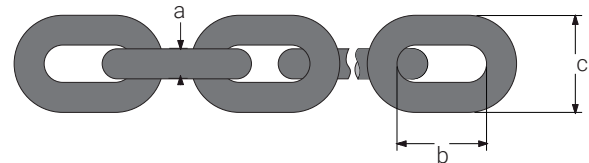

- lanac prema standardu: EN 818-2
- visokokvalitetni lanac za prijenos i vuču tereta
- 25% jači od lanca G80
- specijaliziran za dinamička i statička opterećenja
- kalibrirane karike lanca
- faktor sigurnosti: 4:1
- temperatura rada za: -40°C do + 200°C (WLL 100%)
- dostupni elementi za lanac G100
- završna obrada: plastificirani plavi

