

## Univerzalna hvataljka za tvrde materijale – tip **PCD-HRC50**

Universal Plate Clamp for hard materials – type **PCD-HRC50**

### Opis i karakteristike proizvoda

Product Description and Characteristics

- izrađena i testirana prema Direktivi 2006/42/EZ i standardu EN 13155  
 manufactured and tested acc. to Directive 2006/42/EC and standard EN 13155
- za vertikalno podizanje i transport čeličnih ploča, limova i konstrukcija površinske tvrdoće do **50 HRC (490 HB)**  
 for vertical lifting and transporting of steel plates, sheets and structures with surface hardness up to **50 HRC (490 HB)**
- sadrži mehanizam (upravljačku ručicu) za pred-zatezanje koji osigurava da hvataljka ne prokliže prilikom podizanja (opterećenja silom) odnosno spuštanja tereta  
 equipped with a pre-tension mechanism ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- čeljust je crvene boje radi lakšeg raspoznavanja  
 jaw (cam) is colored red for easy identification

### Upotreba & održavanje


Use & Maintenance

- za materijale površinske tvrdoće do **50 HRC (490 HB)**  
 for materials with surface hardness up to **50 HRC (490 HB)**
- zabranjeno dizanje tereta čija je težina manja od 10% max. nosivosti (WLL) hvataljke  
 DO NOT lift loads less than 10% of max. working load limit of clamp
- zabranjeno dizanje tereta čija je temperatura veća od 100 °C  
 DO NOT lift loads with temperature greater than 100 °C
- zabranjeno dizanje tereta čija je površina onečišćena prašinom ili mazivom  
 DO NOT lift loads whose surface is contaminated with dust or grease
- zabranjeno koristiti za terete od nehrđajućeg čelika ili bakra  
 DO NOT use for load made of stainless steel or copper

### Tehnički parametri i dimenzije

Technical Parameters & Dimensions

WLL t	R mm	T mm	U mm	V mm	L mm	Težina / Weight kg / pc
<b>0,5</b>	0-15	205	30	105	48	2
<b>1,0</b>	0-20	300	50	145	66	5
<b>2,0</b>	0-25	385	68	175	75	8
<b>3,0</b>	0-30	430	75	215	102	15
<b>5,0</b>	0-50	500	68	232	112	23
<b>8,0</b>	0-45	600	88	290	125	37
<b>12,0</b>	50-90	700	90	420	128	50
<b>16,0</b>	60-100	710	100	445	128	65
<b>20,0</b>	0-80	948	100	563	140	160
<b>30,0</b>	10-90	944	100	568	142	167

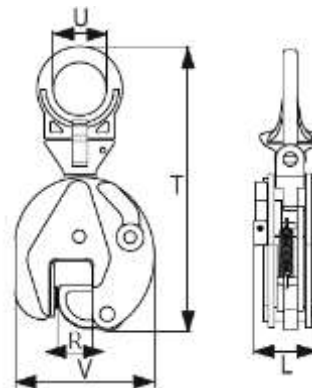

### Usklađenost univerzalne hvataljke i materijala

Universal Plate Clamp and Material Compatibility

